

**CODE ARTICLE: 1030749**
Honeywell Adaptec

Taille de la monture : Standard
Couleur de la monture : Noir/Rouge
Teinte de lentille : Transparent

Honeywell**Présentation générale****Numéro de référence**

1030749

Type de produit

Protection oculaire et faciale

Gamme

Lunettes

Ligne

Verre unique

Marque

Honeywell

Industrie

- Constructeur automobile et équipementier
- Bâtiment et travaux publics
- Énergie ou électricité
- Industrie générale
- Nettoyage industriel
- Laboratoire
- Logistique
- Maintenance
- Industrie médico-pharmaceutique
- Offshore
- Services
- Construction navale
- Télécommunications
- Industries textiles
- Transport
- Services collectifs

Utilisation du produit

Produit adapté aux tâches présentant des risques d'abrasion, de formation de buée, de particules atmosphériques, d'impact, de faible visibilité due à la luminosité et d'éblouissement

Caractéristiques & Avantages**Caractéristique**

Pont ajustable

Avantage

Le pont à trois positions est simple à régler et garde les yeux centrés dans la lentille, où la clarté optique est la meilleure. La vision, moins limitée, engendrant moins de fatigue oculaire, le porteur des lunettes travaille confortablement plus longtemps, avec une meilleure acuité visuelle.

Caractéristique

Plaquettes auto-ajustables

Avantage

Un matériau souple permet à chaque plaquette nasale de s'adapter à la morphologie du porteur, et d'assurer confort, contact et stabilité.

Caractéristique

Ajustabilité de l'angle de la lentille

Avantage

Plus de sécurité, moins de buée ! Sept positions verrouillables pour chaque charnière de branche - 30 degrés de réglage personnalisé pour que l'angle de la lentille soit optimal du point de vue de la protection oculaire et de la circulation de l'air.

Caractéristique

Micro-ajustement des branches

Avantage

Un concept de branche propriétaire (en attente de brevet) qui permet aux porteurs de régler la tension des branches à tout moment, en toute sécurité et sans retirer la paire de lunettes. Les porteurs peuvent régler les lunettes en fonction de leurs critères de confort personnels ou du travail à effectuer - un serrage plus ajusté pour un travail actif ou un serrage plus relâché pour une utilisation moins exigeante. La branche temporale de la paire Honeywell Adaptec comprend un insert rigide qui coulisse pour contrôler la pression sur la tempe. Le porteur peut faire coulisser l'insert d'avant en arrière pour un serrage plus ajusté, ou d'arrière en avant pour un serrage plus lâche.

Caractéristique

Trois tailles au choix (Standard, Étroit et Large)

Avantage

Trois tailles garantissent une bonne protection, de meilleures performances et une clarté optique pour chacun sur son lieu de travail, quelles que soient ses caractéristiques morphologiques. Honeywell Adaptec s'adapte à tous les visages !

Caractéristique

Un style

Avantage

Simplicité de stockage et de commande et unité de style pour tous sur le lieu de travail. Il sera désormais inutile d'arrêter 3 à 5 styles de lunettes variés auprès de différents fabricants.

Caractéristique

Monture ventilée et coussinée

Avantage

Plus de clarté, moins de buée !

Caractéristique

Nouveau revêtement Honeywell 4A+

Avantage

Le revêtement Honeywell Adaptec 4A+ sur chaque face de la lentille (K&N) offre d'excellentes propriétés anti-buée, anti-statiques et résistantes aux rayures

Descriptif technique

Type de lunettes

Lunettes

Couleur de l'oculaire

Transparent

Traitement de l'oculaire

Revêtement 4A+

Matériau de l'oculaire

Polycarbonate

Couleur de la monture

Noir/Rouge

Matière de la monture

Polycarbonate

Diélectrique

Oui

Modèle de plaquettes de nez

Adjustable

Certifications

 Déclaration de conformité CE**EPI catégorie CE**

2

Assurance qualité

ISO 9001 / 2000

Numéro de certificat CE

C1170.2N

Attestation CE EC Attestation**Numéro d'attestation**

C1170.2N

Certifications

- EN 50 m

REACH**Conformité au règlement CE 1907/2006 (REACH)**

The substance(s) listed below may be contained in this product above the threshold level of 0.1% by weight of the listed article.

Références des produits vendus en Europe	Substance > 0,1 %
Nom de la substance	Numéro CAS
No Substance Content	

Documentation

3v Adaptec A4 ok BD

http://www.honeywellsafety.com/supplementary/documents_and_downloads/eye_and_face_protection/eyewear/44351/1033.aspx

Photos et images**Téléchargement de logiciels****Conditionnement****Code EAN**

883940034300

Unité de mesure

chacun

Quantité par boîte/kit/étui

10

Quantité par carton

50

Pays d'origine

États-Unis

EC-type examination certificate

C1170.2N

Manufacturer	North Safety Products, LLC (dba Honeywell Safety Products) 2000 Plainfield Pike CRANSTON, RI 02921, USA
Authorised EU Representative	North Safety Products Europe B.V. Anodeweg 1 4338 RA MIDDELBURG THE NETHERLANDS
Identification of the manufacturer	N
Product type	Eye-protector, safety spectacles with filtering action, welding, UV and sunglare filters
Model name	ADAPTEC see schedule identifying the different lens types
Standard(s) / technical rules	DIN EN 166 : 2001, 169 : 2002, 170 : 2002, 172 : 1994 + A1 : 2000 + A2 : 2001 Essential requirements according to Annex II of the PPE-Directive 89/686/EEC
Test reports	1012-ECS-11 and 1023-ECS-11
Material	Lenses: polycarbonate Temples and brow: plastics
Marking	Welding: X N 1 FT Z – 166 FT CE UV: 2C-X N 1 FT Z – 166 FT CE Sunglare: 5-Y N 1 FT Z – 166 FT CE for X,Y,Z and further marking details see the schedule for the different models

Herewith, ECS certifies that the named model complies with the basic requirements for health and safety as they are provided by the European Directive for Personal Protective Equipment 89/686/EEC. This certificate is based both / either on the test results as they are summarized in the named test reports, and/or on the technical documentation as it is delivered by the manufacturer. The applicant / manufacturer agree to the General Business Rules of the ECS GmbH and to additional agreements as they are named in the application for conformity assessment.


The eye-protection device is to be marked as assigned. Either / both the frame and / or the ocular, spectacle, goggle or shield must be signed, as appropriate. If different marking has been assessed, the lowest marking must be applied, respectively.

The validity of this EC-type examination will expire on the date as mentioned below, and if the manufacturer modifies the safety-relevant properties of this product with comparison to the tested one or if the requirements in the standards or technical rules will be revised and/or tightened.

Name, address and identification number 1883 of the notified body ECS are to be indicated in the information brochure of this product.

This EC-type examination certificate is valid until 2016-03.

ECS GmbH
Notified Body 1883
15/08/11



Dr. Bernhard Schmitz
ECS-Certification



ECS GmbH – European Certification Service
Augenschutz und Persönliche Schutzausrüstung
Laserschutz und Optische Messtechnik
Hüttfeldstraße 50
73430 Aalen, Germany

CERTIFICATION SCHEDULE

Company: North Safety Products, LLC (dba Honeywell Safety Products), CRANSTON RI 02921, USA
EU-Representative: North Safety Products Europe B.V., 4338 RA MIDDELBURG, THE NETHERLANDS

C1170.2N page 2/3

Annex to the EC-type examination certificate registration number C1170.2N,
dated from 15/08/11:

The following products are included in this EC-type examination certificate:

Spectacle Name	SAP #	Filter Action	Scale and Marking Lens	Marking Frame	Measurement Report
Adaptec Clear, Wide Narrow Regular	1030750, 1030749, 1030740, 1030739, 1030760, 1030759	UV	2C-1.2 N 1 FT KN	166 FT 166 FT H (Narrow)	101211-ECS-11, 101215-ECS-11, 10121-ECS-11, 10125-ECS-11, 10126-ECS-11, 101210-ECS-11
Adaptec Smoke, Wide Narrow Regular	1030755, 1030754, 1030745, 1030744, 1030765, 1030764	UV and Sunglare	2C-3 / 5-3.1 N 1 FT KN	166 FT 166 FT H (Narrow)	101212-ECS-11, 101215-ECS-11, 10122-ECS-11, 10125-ECS-11, 10127-ECS-11, 101210-ECS-11
Adaptec Amber, Wide Narrow Regular	1030748, 1030738, 1030758	UV	2C-1.2 N 1 FT KN	166 FT 166 FT H (Narrow)	101213-ECS-11, 101215-ECS-11, 10123-ECS-11, 10125-ECS-11, 10128-ECS-11, 101210-ECS-11
Adaptec I/O Mirror Wide Narrow Regular	1030751, 1030741, 1030761	UV and Sunglare	2C-1.7 / 5-1.7 N 1 FT KN	166 FT 166 FT H (Narrow)	101214-ECS-11, 101215-ECS-11, 10124-ECS-11, 10125-ECS-11, 10129-ECS-11, 101210-ECS-11
Adaptec Blue Mirror, Wide Narrow Regular	1030753, 1030763, 1030743	UV and Sunglare	2C-3 / 5-3.1 N 1 FT KN	166 FT 166 FT H (Narrow)	102314-ECS-11, 102315-ECS-11, 10234-ECS-11, 10235-ECS-11, 10239-ECS-11, 102310-ECS-11
Adaptec IR 5.0, Wide Narrow Regular	1030747, 1030737, 1030757	Welding	5 N 1 FT	166 FT 166 FT H (Narrow)	102313-ECS-11, 102315-ECS-11, 10233-ECS-11, 10235-ECS-11, 10238-ECS-11, 102310-ECS-11

Additional specifications:

C1170.2N page 3/3

Valid for all types:

Optical class: 1

Protection against high-speed particles, low energy impact at extremes of temperatures (FT)

Valid for the mentioned oculars:

K: resistance to surface damage by fine particles

The spectacle models Clear, Smoke and Amber provide K (resistance to surface damage by small particle) on both lenses' surfaces

The spectacle models I/O mirror and Blue Mirror provide K (resistance to surface damage by small particle) on the outer lenses' surface.

N: resistance to fogging of oculars

The spectacle models Clear, Smoke and Amber provide N (resistance to fogging of oculars) on both lenses' surfaces. The spectacle models I/O mirror and Blue Mirror provide N (resistance to fogging of oculars) on the inner, eye-facing outer lenses' surface.

Additional remark:

If the lenses and frames are marked separately, the following markings shall be applied:

- for the lenses: X / Y N 1 FT Z (for X, Y, Z see table above)
- for the frame: N 166 FT CE. The Narrow-variants are designed to fit to a small head and must be marked by H, respectively.



Déclaration de conformité CE

Le fabricant ou le fournisseur agissant en qualité de représentant légal au sein de la Communauté européenne:

Honeywell Safety Products Europe

Déclare que l'Équipement de Protection Individuelle décrit ci-dessous est conforme aux dispositions de la Directive européenne 89/686/CEE:

Désignation: Honeywell Adaptec

Référence: 1030749

Norme(s): EN166

Cet EPI fait l'objet du certificat d'examen CE ci-dessous, n °:

C1170.2N

Délivré par:

ECS European Certification Service GmbH

Hüttfeldstraße 50

73430 AALEN

Germany

Fait en Aalen, Germany, le 24/11/2017

Par: Bernhard Schmit


Division: Protection oculaire et faciale

HONEYWELL SAFETY PRODUCTS EUROPE
Immeuble Edison - ZI Paris Nord II - 33 rue des Vanesses
BP 55288 Villepinte - 95958 ROISSY CDG CEDEX
SAS au capital 17 750 000 € - Siret 348 882 307 00137
Tel. +331 4990 7979 - Fax +331 4990 7980

ZI Paris Nord II 33, rue des Vanesses BP 50288 95958 Roissy CDG France

Tel: +33 (0) 49 90 79 79 Fax: +33 (0)1 49 90 79 80

www.honeywellsafety.com



Research shows that different facial features demand customized adjustability.

Setting out with a new approach to safety eyewear, Honeywell wanted to create a product that would fit everyone — no matter their gender, ethnicity, or facial features. After completing a landmark eyewear research study, the company poured everything it learned into the development of the Honeywell Adaptec eyewear. The result? An adjustable eyewear system that can be worn by the widest range of workers and still deliver excellent protection, superior comfort, customized adjustability, premium optics, and a stylish look.

One style

means simplicity of stocking and ordering as well as consistent usage by workers.

Three sizes

means the right protection, improved performance and optical clarity for everyone in your workplace.

Customized fit & performance

means personalized comfort for each wearer, ensuring all-day protection and compliance with safety requirements.

Honeywell Adaptec™ offers personalized eye protection in all the right places, and adjusts in seconds for customized all-day comfort.

Ordering Information

Most of Honeywell Adaptec™ lenses offer K & N coating on both sides of the lens, and are available with tints for most applications.



Honeywell Ref #	North ref #	Frame Colour	Lens tint	Marking Ocular - Marking Frame
REGULAR SIZE				
1030750	T5901LBL	Blue/Grey	Clear	2C-1,2 EN166 1 FT KN CE
1030753	T5901LBLBM	Blue/Grey	Blue Mirror	2C-3 / 5-3,1 EN166 1 FT CE
1030755	T5901LBLS	Blue/Grey	Smoke	2C-3 / 5-3,1 EN166 1 FT KN CE
1030749	T5901LTK	Black/Red	Clear	2C-1,2 EN166 1 FT KN CE
1030748	T5901LTKA	Black/Red	Amber	2C-1,2 EN166 1 FT KN CE
1030747	T5901LTKG5	Black/Red	IR 5.0	5 EN166 1 FT CE
1030754	T5901LTKS	Black/Red	Smoke	2C-3 / 5-3,1 EN166 1 FT KN CE
1030751	T5901LTKTCG	Black/Red	I/O Mirror lens	2C-1,7 / 5-1.7 EN166 1 FT KN CE
NARROW SIZE				
1030740	T5901NBL	Blue/Grey	Clear	2C-1,2 EN166 1 FT H KN CE
1030743	T5901NBLBM	Blue/Grey	Blue Mirror	2C-3 / 5-3,1 EN166 1 FT H CE
1030745	T5901NBLS	Blue/Grey	Smoke	2C-3 / 5-3,1 EN166 1 FT H KN CE
1030739	T5901NTK	Black/Red	Clear	2C-1,2 EN166 1 FT H KN CE
1030738	T5901NTKA	Black/Red	Amber	2C-1,2 EN166 1 FT H KN CE
1030737	T5901NTKG5	Black/Red	IR 5.0	5 EN166 1 FT H CE
1030744	T5901NTKS	Black/Red	Smoke	2C-3 / 5-3,1 EN166 1 FT H KN CE
1030741	T5901NTKTCG	Black/Red	I/O Mirror lens	2C-1,7 / 5-1.7 EN166 1 FT H KN CE
WIDE SIZE				
1030760	T5901WBL	Blue/Grey	Clear	2C-1,2 EN166 1 FT KN CE
1030763	T5901WBLBM	Blue/Grey	Blue Mirror	2C-3 / 5-3,1 EN166 1 FT CE
1030765	T5901WBLS	Blue/Grey	Smoke	2C-3 / 5-3,1 EN166 1 FT KN CE
1030759	T5901WTK	Black/Red	Clear	2C-1,2 EN166 1 FT KN CE
1030758	T5901WTKA	Black/Red	Amber	2C-1,2 EN166 1 FT KN CE
1030757	T5901WTKG5	Black/Red	IR 5.0	5 EN166 1 FT CE
1030764	T5901WTKS	Black/Red	Smoke	2C-3 / 5-3,1 EN166 1 FT KN CE
1030761	T5901WTKTCG	Black/Red	I/O Mirror lens	2C-1,7 / 5-1.7 EN166 1 FT KN CE

Packaging Information (Eyewear): Unit Box (1), Ten-Pack (10), Case (50)

Sperian Protection

Immeuble Edison - Paris Nord 2
33, rue des Vanesses - BP 55288 Villepinte
95958 Roissy CDG Cedex - France
Tél : +33 (0)1 49 90 79 79
Fax : +33 (0)1 49 90 71 04
infofrance@sperian.com
www.sperian.com

North By Honeywell


Anodeweg 1
4338 RA Middelburg
The Netherlands
Tel: +31 (0) 118 65 64 00
Fax: +31 (0) 118 62 75 35
E-Mail: HLS.NL51.Info@Honeywell.com

Honeywell

DOC2470 - July 2011 - © 2011 Honeywell International Inc.

Honeywell Adaptec


Honeywell

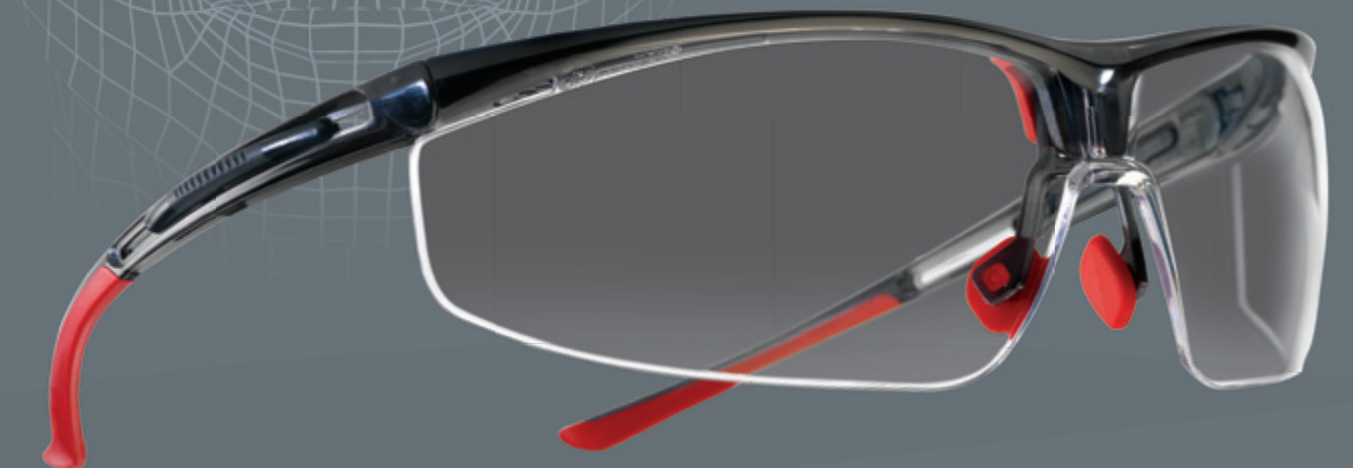

Honeywell Adaptec™
Protective Eyewear System

One style. Three sizes.
Customized fit & performance.

SPERIAN IS NOW HONEYWELL

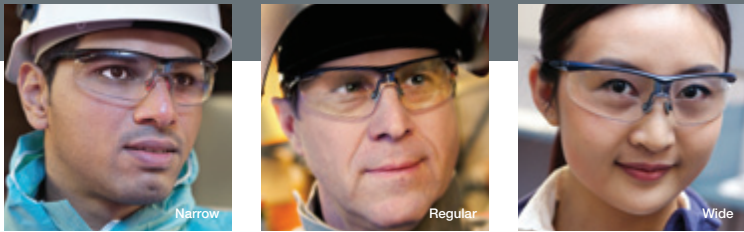

Honeywell Adaptec[®]
Protective Eyewear System



1 Stay alert with less eye fatigue
Adjustable nose bridge keeps eyes centered in lens for clearer optics and reduced eye fatigue.

2 See clearly with less fogging
Vented, cushioned frame allows optimum air circulation and combined with the N certified coating on both sides of the lens reduces fogging.

3 Be more protected
Ratcheting temple hinges adjust lens angle for greater protection and reduced fogging.


4 Be more secure
Proprietary temple design (patent pending) adjusts temple tension for personal comfort and security. Temple inserts slide from front to back for firmer fit, – or in opposite direction for looser fit.

5 Be more comfortable
Soft, flexible material covers frame components for comfortable, secure fit.

6 Ready for any condition
The Adaptec 4A+ lens coating on both sides of the lens (K & N) ensures excellent anti-fog, anti-static and scratch- resistant properties.

Adjustable nose bridge centers eyes to reduce fatigue

Three-position nose bridge is simple to adjust and keeps eyes centered in the lens, where optical clarity is best. Workers' vision is less strained so they experience less eye fatigue, work more comfortably for longer periods, and can more clearly see their work.

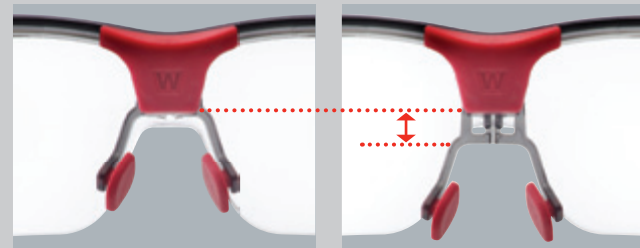


Self-adjusting nose pads add to worker comfort

Soft, flexible material allows each nose pad to independently conform to the wearer's face, delivering greater comfort, contact, and stability.



Adjustable lens angle improves safety and reduces fogging

Each temple hinge ratchets to seven positions — 30° of custom adjustability — so lens is angled for both optimal eye protection and ideal space for air circulation.

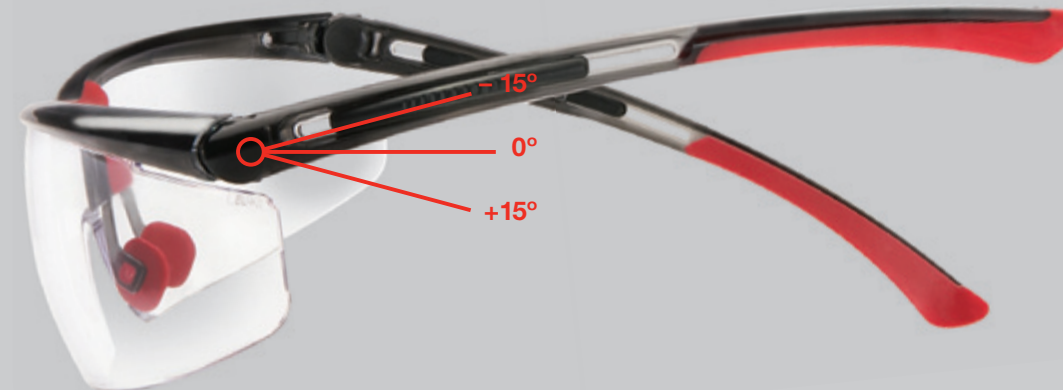

Temples micro-adjust for a snug fit and all-day comfort

A proprietary temple design (patent pending) allows workers to adjust temple tension anytime, safely and without removing eyewear. Workers can adjust for personal preference or task at hand – a firmer fit for active work or a lighter fit for general wear.

Temple arm features a rigid insert that slides to control pressure against the head. Wearer can slide insert from front to back for a firmer fit, or back to front for a looser fit.

