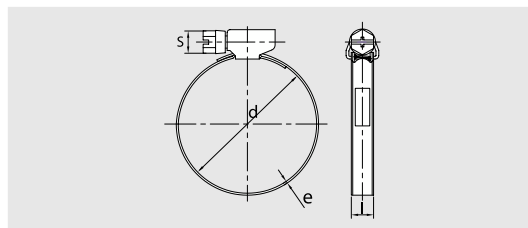
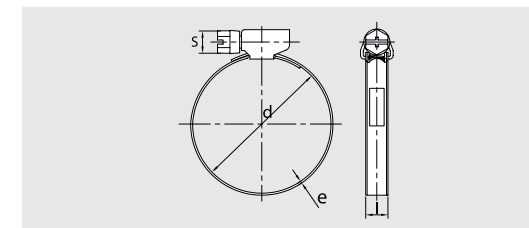


**W4****NPSS**  
DIN 3017**Acton****COLLIER DE SERRAGE BANDE NON PERFOREE  
DE 5 MM, 9 MM OU 12 MM**WORM DRIVE HOSE CLAMPS NON PERFORATED BAND 5, 9 OR 12 MM  
SCHNECKENGEWINDESCHELLEN GEPRÄGTES BAND 5, 9 ODER 12 MM  
ABRAZADERA SIN FIN, CINTA NO PERFORADA DE 5, 9 O 12 MM

d	Code	s	e	l	Cond.	kg/100
7-11	NPSS5 7-11	4	0,4	5,1	50	0,270
10-19	NPSS5 10-19	4	0,4	5,1	50	0,310
8-12	NPSS9 8-12	7	0,73	9,15	50	1,200
10-16	NPSS9 10-16	7	0,73	9,15	50	1,300
12-22	NPSS9 12-22	7	0,73	9,15	50	1,400
16-27	NPSS9 16-27	7	0,73	9,15	50	1,500
20-32	NPSS9 20-32	7	0,73	9,15	50	1,600
25-40	NPSS9 25-40	7	0,73	9,15	25	1,700
32-50	NPSS9 32-50	7	0,73	9,15	25	1,800
40-60	NPSS9 40-60	7	0,73	9,15	25	1,900
50-70	NPSS9 50-70	7	0,73	9,15	20	2,100
60-80	NPSS9 60-80	7	0,73	9,15	20	2,300
70-90	NPSS9 70-90	7	0,73	9,15	10	2,400
80-100	NPSS9 80-100	7	0,73	9,15	10	2,500
90-110	NPSS9 90-110	7	0,73	9,15	10	2,700
100-120	NPSS9 100-120	7	0,73	9,15	10	2,800
110-130	NPSS9 110-130	7	0,73	9,15	10	2,900
120-140	NPSS9 120-140	7	0,73	9,15	10	3,100
16-27	NPSS12 16-27	7	0,73	12,15	25	1,800
20-32	NPSS12 20-32	7	0,73	12,15	25	1,900
25-40	NPSS12 25-40	7	0,73	12,15	25	2,000
30-45	NPSS12 30-45	7	0,73	12,15	25	2,100
32-50	NPSS12 32-50	7	0,73	12,15	25	2,200
40-60	NPSS12 40-60	7	0,73	12,15	10	2,500
50-70	NPSS12 50-70	7	0,73	12,15	10	2,700
60-80	NPSS12 60-80	7	0,73	12,15	10	3,000
70-90	NPSS12 70-90	7	0,73	12,15	10	3,200
80-100	NPSS12 80-100	7	0,73	12,15	10	3,400
90-110	NPSS12 90-110	7	0,73	12,15	10	3,700
100-120	NPSS12 100-120	7	0,73	12,15	10	3,900
110-130	NPSS12 110-130	7	0,73	12,15	10	4,100
120-140	NPSS12 120-140	7	0,73	12,15	10	4,400
130-150	NPSS12 130-150	7	0,73	12,15	10	4,600
140-160	NPSS12 140-160	7	0,73	12,15	10	4,800
150-170	NPSS12 150-170	7	0,73	12,15	10	5,000
160-180	NPSS12 160-180	7	0,73	12,15	10	5,200
170-190	NPSS12 170-190	7	0,73	12,15	10	5,400
180-200	NPSS12 180-200	7	0,73	12,15	10	5,600
190-210	NPSS12 190-210	7	0,73	12,15	10	5,800
200-220	NPSS12 200-220	7	0,73	12,15	10	6,000

**i+Info** Couple de serrage recommandé / recommended torque :  
5 mm = 0.9Nm ; 9 mm = 4Nm ; 12 mm = 5.5Nm**W5****NPSSM**  
DIN 3017**Acton****COLLIER DE SERRAGE BANDE NON PERFOREE  
DE 9 MM OU 12 MM**WORM DRIVE HOSE CLAMPS NON PERFORATED BAND 9 OR 12 MM  
SCHNECKENGEWINDESCHELLEN GEPRÄGTES BAND 9 ODER 12 MM  
ABRAZADERA SIN FIN, CINTA NO PERFORADA DE 9 O 12 MM

d	Code	s	e	l	Cond.	kg/100
8-12	NPSSM9 8-12	7	0,73	9,15	50	1,200
10-16	NPSSM9 10-16	7	0,73	9,15	50	1,300
12-22	NPSSM9 12-22	7	0,73	9,15	50	1,400
16-27	NPSSM9 16-27	7	0,73	9,15	50	1,500
20-32	NPSSM9 20-32	7	0,73	9,15	50	1,600
25-40	NPSSM9 25-40	7	0,73	9,15	25	1,700
30-45	NPSSM9 30-45	7	0,73	9,15	25	1,800
32-50	NPSSM9 32-50	7	0,73	9,15	25	1,900
40-60	NPSSM9 40-60	7	0,73	9,15	25	2,000
50-70	NPSSM9 50-70	7	0,73	9,15	20	2,100
60-80	NPSSM9 60-80	7	0,73	9,15	20	2,300
70-90	NPSSM9 70-90	7	0,73	9,15	10	2,400
80-100	NPSSM9 80-100	7	0,73	9,15	10	2,500
90-110	NPSSM9 90-110	7	0,73	9,15	10	2,700
16-27	NPSSM12 16-27	7	0,73	12,15	25	1,800
20-32	NPSSM12 20-32	7	0,73	12,15	25	1,900
25-40	NPSSM12 25-40	7	0,73	12,15	25	2,000
30-45	NPSSM12 30-45	7	0,73	12,15	25	2,000
32-50	NPSSM12 32-50	7	0,73	12,15	25	2,200
40-60	NPSSM12 40-60	7	0,73	12,15	10	2,500
50-70	NPSSM12 50-70	7	0,73	12,15	10	2,700
60-80	NPSSM12 60-80	7	0,73	12,15	10	3,000
70-90	NPSSM12 70-90	7	0,73	12,15	10	3,200
80-100	NPSSM12 80-100	7	0,73	12,15	10	3,400
90-110	NPSSM12 90-110	7	0,73	12,15	10	3,700
100-120	NPSSM12 100-120	7	0,73	12,15	10	3,900
110-130	NPSSM12 110-130	7	0,73	12,15	10	4,100
120-140	NPSSM12 120-140	7	0,73	12,15	10	4,400
130-150	NPSSM12 130-150	7	0,73	12,15	10	4,600
140-160	NPSSM12 140-160	7	0,73	12,15	10	4,800
150-170	NPSSM12 150-170	7	0,73	12,15	10	5,000
160-180	NPSSM12 160-180	7	0,73	12,15	10	5,200
170-190	NPSSM12 170-190	7	0,73	12,15	10	5,400
180-200	NPSSM12 180-200	7	0,73	12,15	10	5,600

**i+Info** Couple de serrage recommandé / recommended torque :  
9 mm = 4Nm ; 12 mm = 5.5Nm