



## Fiche Technique (2021-10-01)

### Prescor Solar

Souppes de sécurité pour installation à énergie solaire.

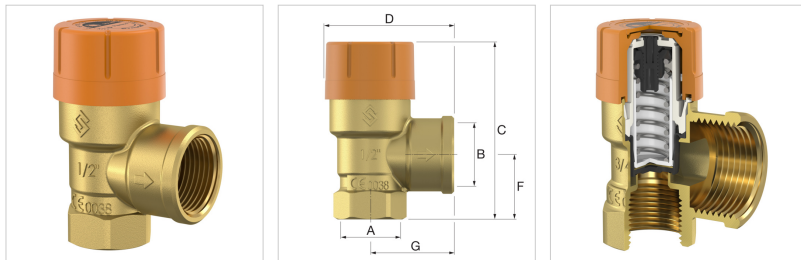

Type	Tarage [bar]	Raccordement		Dimensions				Capacité [kW]		Code
		A	B	C [mm]	D [mm]	F [mm]	G [mm]			
Prescor Solar 1/2 - 3.0 bar	3,0	Rp 1/2"	Rp 3/4"	75	54	26,5	34,5	50	40	28310
Prescor Solar 1/2 - 6.0 bar	6,0	Rp 1/2"	Rp 3/4"	75	54	26,5	34,5	50	40	28311
Prescor Solar 3/4 - 6.0 bar	6,0	Rp 3/4"	Rp 1"	77	56	29,5	36,5	100	40	28316
Prescor Solar 3/4 - 8.0 bar	8,0	Rp 3/4"	Rp 1"	77	56	29,5	36,5	100	40	28317
Prescor Solar 1 - 6.0 bar	6,0	Rp 1"	Rp 1 1/4"	101	74	36,0	47	200	16	28321
Prescor Solar 1 - 8.0 bar	8,0	Rp 1"	Rp 1 1/4"	101	74	36,0	47	200	16	28322
Prescor Solar 1 - 10.0 bar	10,0	Rp 1"	Rp 1 1/4"	101	74	36,0	47	200	16	28323



### Caractéristiques techniques

- Température min./max. de l'installation: -30 °C / 120 °C.
- Charge de pointe: 160 °C.
- Taux maximum de glycol: 50%.

**Trouvez de plus amples informations en ligne:**

[Installation et mode d'emploi](#)

[CE PED declaration](#)

[PED Module D](#)

[TÜV certificate](#)

[Declaration of conformity UKCA](#)

[Prescor Solar ADSK](#)

[Prescor Solar ADSK Revit](#)

[Prescor Solar DWG](#)

[Prescor Solar STEP](#)

[Brochure 3 - Accessoires chauffage](#)

Flamco s.a.r.l.

ZI du Vert Galant 1, rue de la Garenne 1

95310, Saint Ouen l'Aumône - fr

**T** 01 342 191 91

**F** 01 303 782 19

**E** [info@flamco.fr](mailto:info@flamco.fr)

**I** [flamcogroup.com/fr](http://flamcogroup.com/fr)