



Rivet Aveugle ouvert ALFO®

cuivre acier zingué
tête plate | ouvert

DIN EN ISO
16582

DONNÉES
CAO
EN LIGNE

Série
705

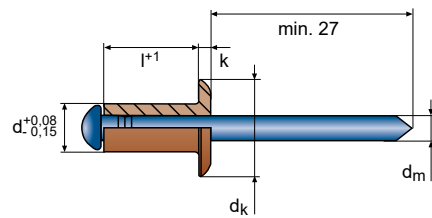

[2.0040]

d	l ⁺¹	$\frac{d}{k}$	N°.	
3,0	10,0	5,0 - 7,0	10705030100	500
	8,0	3,0 - 5,0	10705030080	500
	6,0	2,0 - 3,0	10705030060	500

dk 6,3 -0,7 **dm** 1,7 **k** 0,8 ±0,2 3,1 mm 760 N 950 N

d	l ⁺¹	$\frac{d}{k}$	N°.	
4,0	10,0	5,0 - 7,0	10705040100	500
	8,0	3,5 - 5,0	10705040080	500
	6,0	2,5 - 3,5	10705040060	500

dk 8,0 -1,0 **dm** 2,0 **k** 1,0 ±0,3 4,1 mm 1500 N 1800 N