



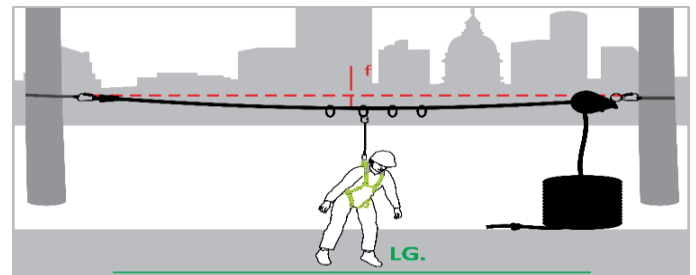


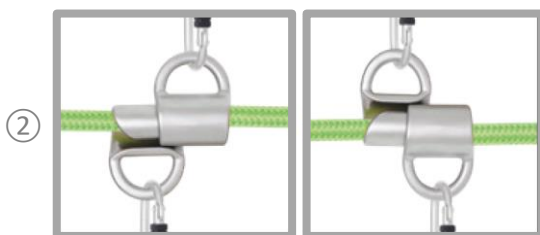



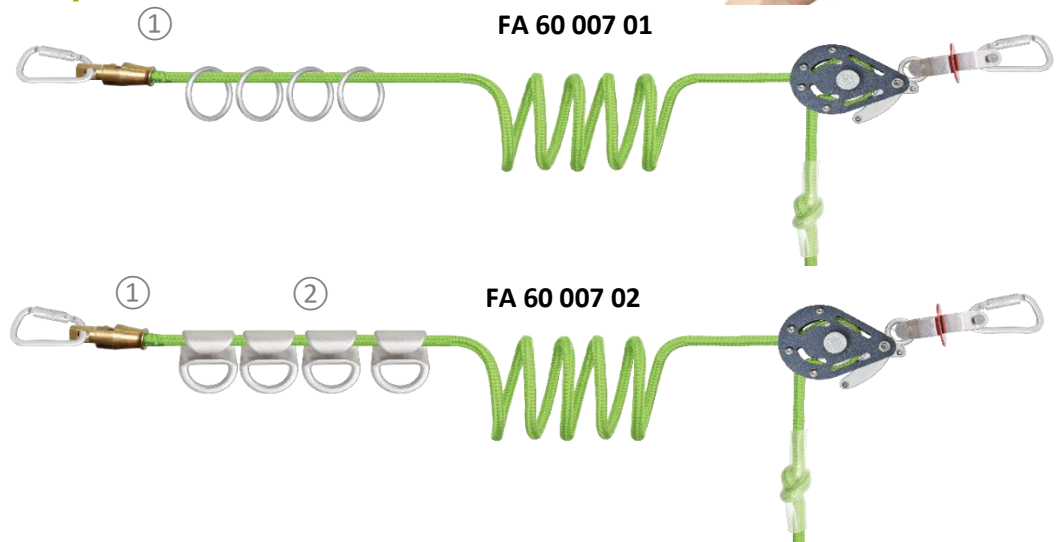


Transport bag  
included



HS CODE
63079098
CARTON SIZE / PCS.
40 x 40 x 24 cm / 1
AET (UE) N°2777/13802-01/E01-01
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland
AET (UKCA) N°AB0321/16007-01/E01-01
<b>Satra Technology Centre, N°0321</b> Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D 11 IN14/14003
<b>SGS United Kingdom Ltd., N°0120</b> Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom

REF.	FA 60 007 01	FA 60 007 02
CE	PPE regulation (EU) 2016/425 Annex II using EN 795:2012, TS 16415:2013	
	x4	
MAT.	 16 mm Polyester	
R (kN) / MBS (kN)	21 kN / 23 kN	
MAT. 		
LG. / f MIN. → MAX.	5.0 m → 25.0 m / 1.2 m → 4.83 m	
+		
	11.64 KG	12.03 KG



**Nombre d'utilisateurs**  
Number of users  
**Cantidad de usuarios**  
Quantità di utilizzatori  
**Anzahl der Benutzer**



**Matière connecteur / tendeur**  
Material of connector / tensioner  
**Material del conector / tensor**  
Materia del connetore / tenditore  
**Material Verbinder / Spanner**

**R (kN) / MBS (kN)**

**Résistance statique (en kN) / Résistance à la rupture**  
Static strength / Minimum Breaking Strength  
**Resistencia estática (en kN) / Resistencia a la ruptura (en kN)**  
Resistenza statica (in kN) / Resistenza alla rottura (in kN)  
**Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)**

**LG. / f MIN. MAX.**

**Longueur mini → maxi / Flèche mini → maxi**  
Min. → Max. length / Min. → Max. deflection  
**Longitud mínima → máxima / Flecha mínima → máxima**  
Lunghezza min. → max. / Flessione min. → max.  
**Länge min. → max. / Dirchhang min. → max.**