


ROTEX® S-H

Accouplement élastique





Accouplement démontable avec moyeux SPLIT

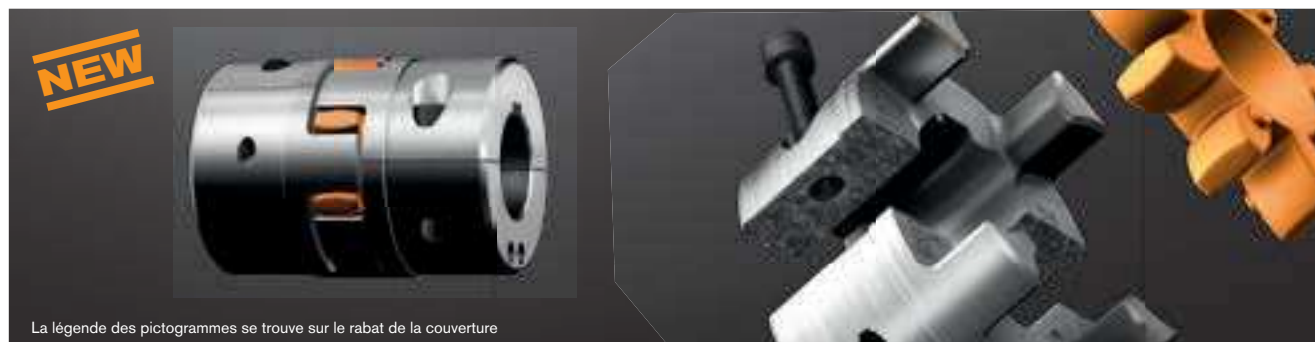

La légende des pictogrammes se trouve sur le rabat de la couverture



Composants

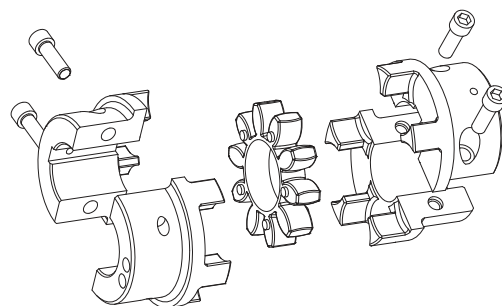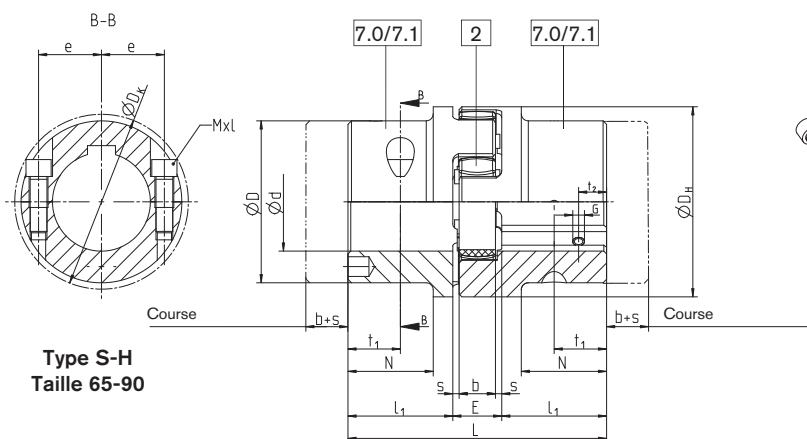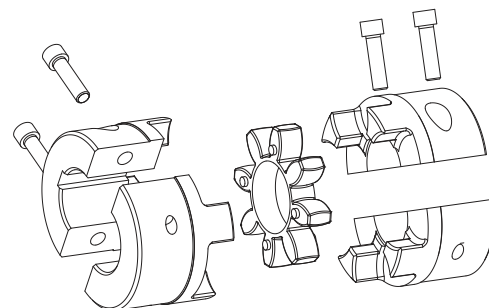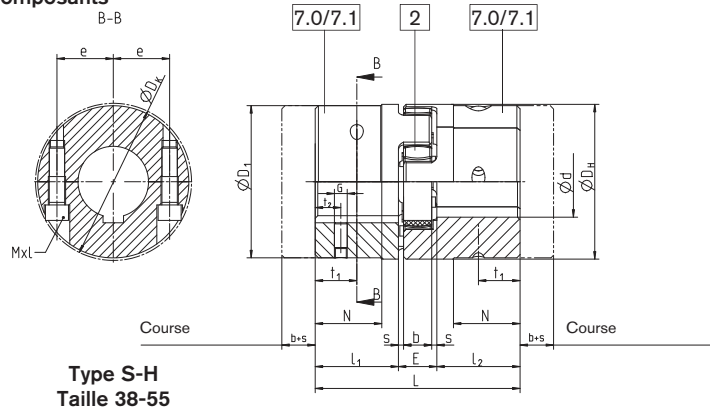

ROTEX® Type S-H																	
Taille	Alésage fini Ød [mm]		Dimensions [mm]													vis DIN EN ISO 4762	
	Mini	maxi	L	l ₁ ; l ₂	E	b	s	D _H	D ₁	D _K	N	e	t ₁	t ₂	G	Mxl	Couple de serrage T _A [Nm]
38	24	45	114	45	24	18	3	80	78	83,5	37	30	22,5	15	M8	M8x30	34
42	24	55	126	50	26	20	3	95	94	97	40	30	25			M10x30	67
48	24	60	140	56	28	21	3,5	105	104	108,5	45	35	28			M12x35	115
55	24	70	160	65	30	22	4	120	118	122	52	40	32,5	20	M10	M12x40	115
65	24	70	185	75	35	26	4,5	135	115	123,5	61	45	37,5			M12x40	115
	70	80							135	132,5		50				M12x45	
75	40	80	210	85	40	30	5	160	135	147	69	51	42,5	25		M16x50	290
	80	90							160	158		57					
90	40	90	245	100	45	34	5,5	200	160	176	81	60	50	30	M12	M20x60	560
	90	110							200	197		72					

7.0 = moyeu SPLIT sans rainure
7.1 = moyeu SPLIT avec rainure

Exemple :

ROTEX® 38	S-H	98 Sh-A	7.1	Ø 38	7.1	Ø30
Taille	Version	Dureté de l'anneau	Forme de moyeu	Alésage fini	Forme de moyeu	Alésage fini