
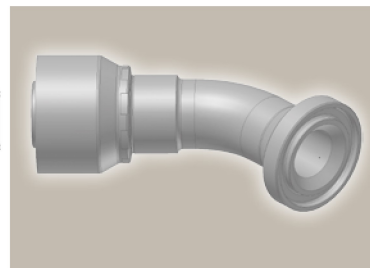


17**Bride ISO 6162-1
coude 45°**

ISO 12151-3 – E45 – L – SFL 45°

(21,0 MPa/ 3000 psi)



Référence		D. Int. du tuyau				Raccordement	A	B	E	F
Série 46	Série 48	DN	pouce	module	mm	pouce	mm	mm	mm	mm
11746-8-8	11748-8-8	12	1/2	-8	12,7	1/2	72	48	20	30
11746-12-8	11748-12-8	12	1/2	-8	12,7	3/4	70	47	21	38
11746-12-10	11748-12-10	16	5/8	-10	15,9	3/4	75	50	24	38
11746-12-12	11748-12-12	19	3/4	-12	19,1	3/4	88	62	26	38
11746-16-12	11748-16-12	19	3/4	-12	19,1	1	88	62	26	45
11746-20-12	11748-20-12	19	3/4	-12	19,1	1 1/4	87	61	25	51
11746-16-16		25	1	-16	25,4	1	109	78	32	45
	11748-16-16	25	1	-16	25,4	1	107	78	32	45
11746-20-16	11748-20-16	25	1	-16	25,4	1 1/4	109	79	32	51
	11748-16-20	31	1 1/4	-20	31,8	1	141	94	38	45
11746-20-20		31	1 1/4	-20	31,8	1 1/4	136	98	38	51
	11748-20-20	31	1 1/4	-20	31,8	1 1/4	141	94	38	51
11746-24-20		31	1 1/4	-20	31,8	1 1/2	136	98	38	60
	11748-24-20	31	1 1/4	-20	31,8	1 1/2	141	94	38	60
	11748-24-24	38	1 1/2	-24	38,1	1 1/2	151	113	44	60
	11748-32-24	38	1 1/2	-24	38,1	2	150	112	44	71
	11748-24-32	51	2	-32	50,8	1 1/2	164	115	44	60
	11748-32-32	51	2	-32	50,8	2	202	153	56	71

Pour les dimensions et références des demi-brides voir la section section Eb.

Série d'embouts compatible avec les tuyaux, en fonction des modules:Aussi disponible en acier inoxydable.
Voir catalogue 4400.1

 46	or	 48	441	441RH	461LT	462	462ST	462TC	462ST	629PU	692PU Twin					
 46	463	492	492ST	492TC	692	692Twin	692TC	BCH1								
 48	301SN	301TC	304	387	387ST	387TC	421RH	421SN	426	436	441RH	462PU	462PU Twin	BCH2	HT2	...
471TC 477 477ST 477TC 477RH 487 487ST 487TC 493 787 787TC 787ST 797 797TC 797ST 811 881																