



XN Bride Caterpillar® coude 90°



Référence	D. Int. du tuyau				Raccordement pouce	A mm	B mm	E mm	F mm
	DN	pouce	module	mm					
1XN77-12-12	19	3/4	-12	19,1	3/4	108	62	63	41
1XN77-16-12	19	3/4	-12	19,1	1	108	62	63	48
1XN77-16-16	25	1	-16	25,4	1	131	77	74	48
1XN77-20-16	25	1	-16	25,4	1 1/4	131	77	74	54
1XN77-20-20	31	1 1/4	-20	31,8	1 1/4	151	87	94	54
1XN77-24-20	31	1 1/4	-20	31,8	1 1/2	151	87	77	64
1XN77-24-24	38	1 1/2	-24	38,1	1 1/2	160	103	106	79
1XN77-32-24	38	1 1/2	-24	38,1	2	169	103	106	79

K5 Bride Komatsu®

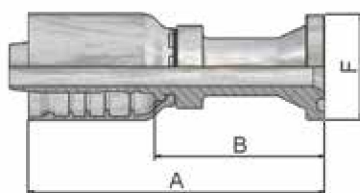

Référence	D. Int. du tuyau				A mm	B mm
	DN	pouce	module	mm		
1K577-16-16	25	1	-16	25,4	119	65

Série d'embouts compatible avec les tuyaux, en fonction des modules:

77 387 | 387ST | 387TC | 487 | 487ST | 487TC | 787 | 787TC | 787ST | 797 | 797TC | 797ST | 797RH | SX42