


## R6MX Té renversé orientable

Triple-Lok® cône 37° / Triple-Lok® femelle tournant 37°  
SAE 070432

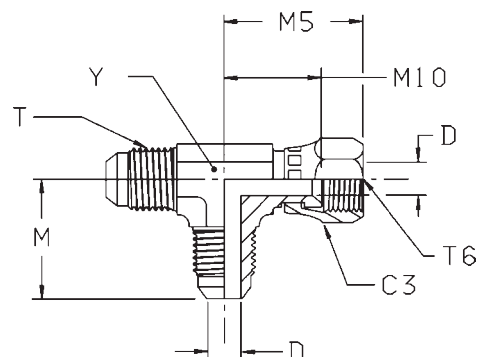

| Ø ext.<br>du tube |       | Filetage<br>UN/UNF-2A<br>T | Filetage<br>UN/UNF-2B<br>T6 | C3<br>mm | D<br>mm | M<br>mm | M5<br>mm | M10<br>mm | Y<br>mm | Poids<br>(Acier)<br>gr./pièce | Triple-Lok®<br>Acier | Triple-Lok®<br>Acier inox | PN (bar) |     |
|-------------------|-------|----------------------------|-----------------------------|----------|---------|---------|----------|-----------|---------|-------------------------------|----------------------|---------------------------|----------|-----|
| mm                | in.   |                            |                             |          |         |         |          |           |         |                               |                      |                           | S        | SS  |
| 6                 | 1/4   | 7/16-20                    | 7/16-20                     | 16       | 4       | 23      | 25       | 17        | 11      | 44                            | <b>4R6MXS</b>        | <b>4 R6X-SS</b>           | 500      | 350 |
| 8                 | 5/16  | 1/2-20                     | 1/2-20                      | 17       | 6       | 24      | 27       | 17        | 13      | 56                            | <b>5R6MXS</b>        | <b>5 R6X-SS</b>           | 420      | 350 |
| 10                | 3/8   | 9/16-18                    | 9/16-18                     | 19       | 8       | 27      | 32       | 22        | 14      | 69                            | <b>6R6MXS</b>        | <b>6 R6X-SS</b>           | 350      | 350 |
| 12                | 1/2   | 3/4-16                     | 3/4-16                      | 22       | 10      | 32      | 35       | 24        | 19      | 136                           | <b>8R6MXS</b>        | <b>8 R6X-SS</b>           | 350      | 350 |
| 14, 15, 16        | 5/8   | 7/8-14                     | 7/8-14                      | 27       | 12      | 37      | 41       | 28        | 22      | 207                           | <b>10R6MXS</b>       | <b>10 R6X-SS</b>          | 350      | 350 |
| 18, 20            | 3/4   | 1 1/16-12                  | 1 1/16-12                   | 32       | 16      | 42      | 44       | 30        | 27      | 319                           | <b>12R6MXS</b>       | <b>12 R6X-SS</b>          | 350      | 350 |
| 22                | 7/8   | 1 3/16-12                  | 1 3/16-12                   | 35       | 18      | 46      | 45       | 34        | 33      | 622                           | <b>14 R6X-S</b>      | <b>14 R6X-SS</b>          | 250      | 250 |
| 25                | 1     | 1 5/16-12                  | 1 5/16-12                   | 38       | 22      | 46      | 51       | 36        | 33      | 489                           | <b>16R6MXS</b>       | <b>16 R6X-SS</b>          | 250      | 250 |
| 28, 30, 32        | 1 1/4 | 1 5/8-12                   | 1 5/8-12                    | 50       | 28      | 52      | 59       | 43        | 41      | 712                           | <b>20R6MXS</b>       | <b>20 R6X-SS</b>          | 250      | 210 |
| 35, 38            | 1 1/2 | 1 7/8-12                   | 1 7/8-12                    | 57       | 33      | 59      | 66       | 47        | 48      | 1100                          | <b>24 R6X-S</b>      | <b>24 R6X-SS</b>          | 170      | 170 |

Les produits sont conformes à notre gamme standard de livraison.  
Les versions métriques et pouces peuvent avoir des 6 pans de dimension différente.

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Les pressions nominales (PN) peuvent différer selon la matière: acier (S) et inox (SS).

