
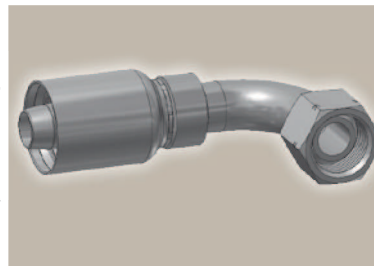


B2 Femelle tournant BSP coude 90°


BS 5200-B – DKR 90°



Référence	D. Int. du tuyau				Filetage BSP	A mm	B mm	E mm	W mm
	DN	pouce	module	mm					
1B277-8-8	12	1/2	-8	12,7	1/2x14	76	41	40	27
1B277-12-12	19	3/4	-12	19,1	3/4x14	108	62	55	32
1B277-16-16	25	1	-16	25,4	1x11	131	77	74	41

EA Femelle tournant BSP avec joint torique

BS 5200 – ISO 12151-6 – DKOR



Référence	D. Int. du tuyau				Filetage BSP	A mm	B mm	W mm
	DN	pouce	module	mm				
1EA77-8-8	12	1/2	-8	12,7	1/2x14	58	23	27
1EA77-10-10	16	5/8	-10	15,9	5/8x14	62	23	30
1EA77-12-10	16	5/8	-10	15,9	3/4x14	63	24	32
1EA77-12-12	19	3/4	-12	19,1	3/4x14	72	26	32
1EA77-16-12	19	3/4	-12	19,1	1x11	82	36	41
1EA77-12-16	25	1	-16	25,4	3/4x14	83	29	32
1EA77-16-16	25	1	-16	25,4	1x11	90	36	41
1EA77-20-20	31	1 1/4	-20	31,8	1 1/4x11	96	33	50
1EA77-24-24	38	1 1/2	-24	38,1	1 1/2	103	36	55
1EA77-32-32	51	2	-32	50,8	2	118	40	70

Série d'embouts compatible avec les tuyaux:

77 787TC 797TC