
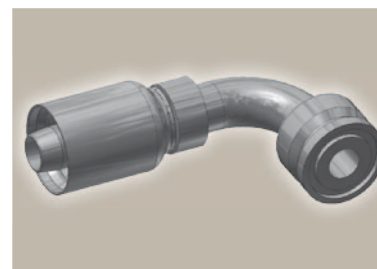


X9**Bride – coude 90°**


Système à bride intégrale

ISO 6162-1 ou ISO 6162-2



Référence	D. Int. du tuyau				A mm	B mm	E mm
	DN	pouce	module	mm			
1X977-8-8	12	1/2	-8	12,7	81	45	43
1X977-12-12	19	3/4	-12	19,1	107,5	61,7	60,5
1X977-16-12	19	3/4	-12	19,1	107,6	61,8	60,5
1X977-12-16	25	1	-16	25,4	110	56	70
1X977-16-16	25	1	-16	25,4	131	77	70
1X977-20-16	25	1	-16	25,4	131	77	70
1X977-16-20	31	1 1/4	-20	31,8	130	67	90
1X977-20-20	31	1 1/4	-20	31,8	148	84	90
1X977-24-20	31	1 1/4	-20	31,8	148	84	90
1X977-24-24	38	1 1/2	-24	38,1	170	103	104

Pour « Système à bride intégrale » voir page Eb-2.

XA**Bride Caterpillar®**

Référence	D. Int. du tuyau				Raccordement pouce	A mm	B mm	F mm
	DN	pouce	module	mm				
1XA77-12-12	19	3/4	-12	19,1	3/4	114	68	41
1XA77-16-12	19	3/4	-12	19,1	3/4	88	42	48
1XA77-16-16	25	1	-16	25,4	1	141	87	48
1XA77-20-16	25	1	-16	25,4	1	104	50	54
1XA77-20-20	31	1 1/4	-20	31,8	1 1/4	152	88	54
1XA77-24-20	31	1 1/4	-20	31,8	1 1/2	121	57	64
1XA77-24-24	38	1 1/2	-24	38,1	1 1/2	176	109	64
1XA77-32-24	38	1 1/2	-24	38,1	2	133	66	79
1XA77-32-32	51	2	-32	50,8	2	192	115	79

Série d'embouts compatible avec les tuyaux:

787TC | 797TC