


Dimensions: Accessoires de montage du vérin

Fixation pivot de chape arrière (DS)/pour accessoires ES

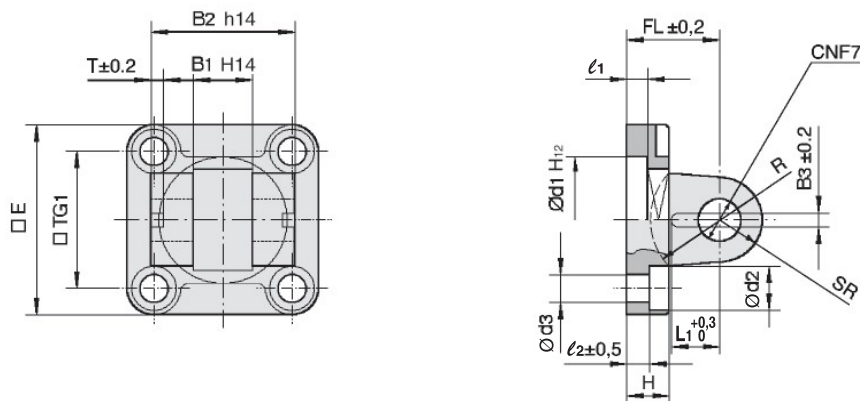


[mm]

Alésage [mm]	Ref.	E	B ₁	B ₂	B ₃	L ₁	TG ₁	T	ℓ ₁ (min.)	ℓ ₂	FL	H (Maxi.)	Ø d ₁	Ø d ₂	Ø d ₃	Ø CN	SR (Maxi.)	R
32	DS5032	45	14	34	3.3	11.5	32.5	3	5	5.5	22	10	30	10.5	6.6	10	11	17
40	DS5040	55	16	40	4.3	12	38	4	5	5.5	25	10	35	11	6.6	12	13	20
50	DS5050	65	21	45	4.3	14	46.5	4	5	6.5	27	12	40	15	9	16	18	22
63	DS5063	75	21	51	4.3	14	56.5	4	5	6.5	32	12	45	15	9	16	18	25
80	DS5080	95	25	65	4.3	16	72	4	5	10	36	16	45	18	11	20	22	30
100	DS5100	115	25	75	6.3	16	89	4	5	10	41	16	55	18	11	20	22	32
125	DS5125	140	37	97	6.3	24	110	6	7	10	50	20	60	20	13.5	30	30	42

* Fourni avec 4 vis, axe d'articulation et fixation d'axe d'articulation.

Fixation pivot d'articulation avec rotule (ES)

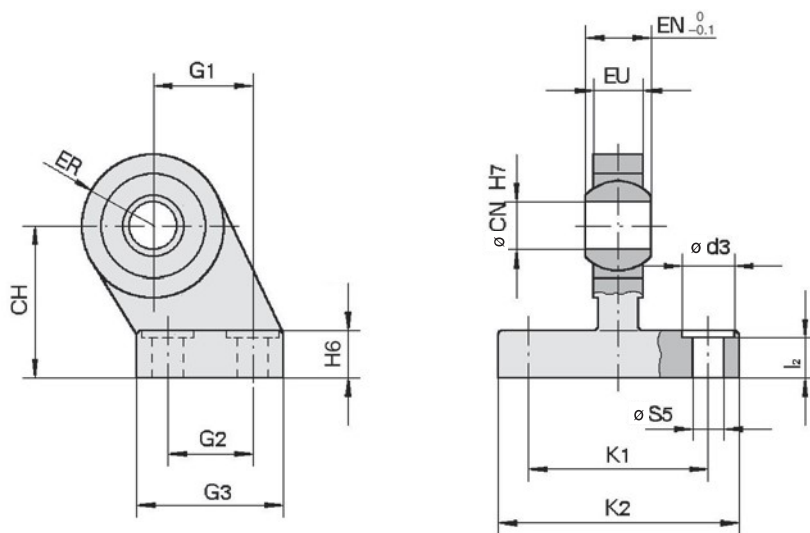

[mm]

Alésage [mm]	Ref.	Ø d ₃	Ø CN	Ø S ₅	K ₁	K ₂ (Maxi.)	ℓ ₂	G ₁	G ₂	G ₃ (Maxi.)	EN	EU	CH	H ₆	ER (Maxi.)
32	ES5032	11	10	6.6	38	51	8.5	21	18	31	14	10.5	32	10	15
40	ES5040	11	12	6.6	41	54	8.5	24	22	35	16	12	36	10	18
50	ES5050	15	16	9	50	65	10.5	33	30	45	21	15	45	12	20
63	ES5063	15	16	9	52	67	10.5	37	35	50	21	15	50	12	23
80	ES5080	18	20	11	66	86	11.5	47	40	60	25	18	63	14	27
100	ES5100	18	20	11	76	96	12.5	55	50	70	25	18	71	15	30
125	ES5125	20	30	13.5	94	124	17	70	60	90	37	25	90	20	40