

Série KQ2

Tubes utilisables : Taille en mm, Filetage : M, R, Rc


Dimensions

Raccord coudé mâle de cloison : KQ2LE



Diam. ext. du tube utilisable [mm]	Modèle	T (M)	H1 (Cotes sur plats)	H2 (Cotes sur plats)	B	E	Ø D	Orifice de montage	M	Surface effective [mm²]		Orifice min.	Masse [g]	With a rib
										Nylon	Urethane			
Ø 4	KQ2LE04-00□	M12 x 1	14	14	14.8	28.5	8.2	13	13.3	4.2	4.2	3	21.2	●
Ø 6	KQ2LE06-00□	M14 x 1	17	17	15.5	29.6	10.4	15	13.3	11.4	9	4.5	29.4	—
Ø 8	KQ2LE08-00□	M16 x 1	17	19	17.2	32.3	13.2	17	14.2	21.6	14.9	6	30.4	●
Ø 10	KQ2LE10-00□	M20 x 1	22	24	19.3	37.9	15.9	21	15.6	35.2	25	7.5	53.5	●
Ø 12	KQ2LE12-00□	M22 x 1	24	27	21.5	40.8	18.5	23	17	50.2	39.7	9	61	●


□ : A (laiton), N (laiton + nickelage chimique)

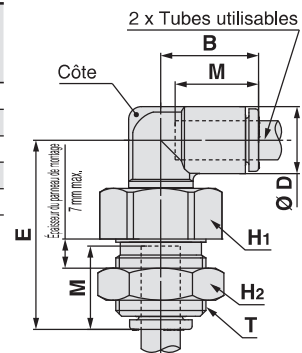

Bouchon : KQ2P



Taille Ø du raccord applicable Ø d	Modèle	Ø D	L	A	Masse [g]
Ø 2	KJP-02	3	17	5,1	0,1
Ø 3,2	KQ2P-23	5	31,5	18,2	1
Ø 4	KQ2P-04	6	32	18,7	1
Ø 6	KQ2P-06	8	35	21,7	1
Ø 8	KQ2P-08	10	39	24,8	2
Ø 10	KQ2P-10	12	43	27,4	3,5
Ø 12	KQ2P-12	14	45,5	28,5	5
Ø 16	KQ2P-16	20,9	47	26,4	8




Adaptateur : KQ2N (Bande d'étanchéité)



Taille Ø du raccord applicable Ø d	Taraudage M	Modèle	H (Cotes sur plats)	L	A	M	Orifice min.	Masse [g]
Ø 4	M5 x 0,8	KQ2N04-M5□	7	29,7	26,7	13,4	2,5	2,4
Ø 6	M5 x 0,8	KQ2N06-M5□	7	29,7	26,7	13,4	2,5	2,6

□ : A (laiton), N (laiton + nickelage chimique)



Adaptateur : KQ2N (Bande d'étanchéité)



Taille Ø du raccord applicable Ø d	Taraudage R	Modèle	H (Cotes sur plats)	L	A*1	M	Orifice min.	Masse [g]
Ø 4	1/8	KQ2N04-01□S	10	28,3	25,2	11,9	2,5	4
Ø 6	1/8	KQ2N06-01□S	10	28,3	25,2	11,9	4	4,1
	1/4	KQ2N06-02□S	14	32,8	28,1	14,8	4	13,6
Ø 8	1/4	KQ2N08-02□S	14	35,9	31,2	17	6	15,7
	3/8	KQ2N08-03□S	17	36	30,9	16,7	6	22,7
Ø 10	3/8	KQ2N10-03□S	17	40,6	35,5	19,9	7,5	19,1

□ : A (laiton), N (laiton + nickelage chimique)

*1 Dimensions de référence après l'installation du filetage R

