

Série KQB2


Tube applicable : Dimensions en mm, Filetage de connexion : G

Dimensions

Raccord droit : KQB2H



Diam. ext. du tube applicable (mm)	Filetage de connexion G	Modèle	H Largeur sur plat	øD	ød	L	A	M	Note 1) Surface effective (mm²)	Poids (g)
ø4	1/8	KQB2H04-G01	14	-	13.8	16.6	11.1	12.6	5.6	9.2
	1/4	KQB2H04-G02	19		17.8	20.6	14.1			23.6
ø6	1/8	KQB2H06-G01	14	-	13.8	17.6	12.1	13.6	13.1	8.9
	1/4	KQB2H06-G02	19		17.8	20.5	14			21.6
ø8	3/8	KQB2H06-G03	22	-	21.8	23.4	15.9	16.1	26.1	38.3
	1/8	KQB2H08-G01	14		13.8	23.9	18.4			13.2
	1/4	KQB2H08-G02	19		17.8	21.2	14.7			19.1
ø10	3/8	KQB2H08-G03	22	-	21.8	24	16.5	17	41.5	35.2
	1/8	KQB2H10-G01	17		13.8	25.1	19.6			19.9
	1/4	KQB2H10-G02	19		17.8	24.9	18.4			24.8
ø12	3/8	KQB2H10-G03	22	-	21.8	23.3	15.8	18.6	58.3	30.9
	1/2	KQB2H10-G04	27		26.5	27.7	18.7			64.4
	1/4	KQB2H12-G02	19		17.8	27.7	21.2			26.3
ø16	3/8	KQB2H12-G03	22	-	21.8	23.5	16	20.8	81	25.5
	1/2	KQB2H12-G04	27		26.5	27.9	18.9			58
	3/8	KQB2H16-G03	24		21.8	31.3	23.8			44.5
ø16	1/2	KQB2H16-G04	27	-	26.5	27.3	18.3		113	43




Note 1) Valeur de tube FEP
Valeur du tube de polyamide pour ø16 uniquement.

Raccord mâle 6 pans creux : KQB2S



Diam. ext. du tube applicable (mm)	Filetage de connexion G	Modèle	H Largeur sur plat	Note 1) øD	ød	L	A	M	Note 2) Surface effective (mm²)	Poids (g)
ø4	1/8	KQB2S04-G01	3	14	14	20.4	14.9	12.6	4.1	13.5
ø6	1/8	KQB2S06-G01	4	14	14	20.6	15.1	13.6	10	12.1
	1/4	KQB2S06-G02		18	18		14.1		10.7	19.9
ø8	1/8	KQB2S08-G01	5	14	14	23.9	18.4	16.1	17.2	12.5
	1/4	KQB2S08-G02	6	18	18	22.9	16.4		23.3	20.1
	3/8	KQB2S08-G03		22	22	23.1	15.6		31.1	31.1
ø10	1/8	KQB2S10-G01	5	17	14	25.1	19.6	17	17.2	18.5
	1/4	KQB2S10-G02	8	18	18	24.9	18.4		39	20.4
	3/8	KQB2S10-G03		22	22	24	16.5			31.2
	1/2	KQB2S10-G04		27	26.5		15			45.3
ø12	1/4	KQB2S12-G02	8	19	18	27.7	21.2	18.6	46	23.6
	3/8	KQB2S12-G03	10	22	22	24.9	17.4		60	27.4
	1/2	KQB2S12-G04		27	26.5		15.9			42.6
ø16	3/8	KQB2S16-G03	10	24.6	22	31.3	23.8	20.8	81	41
	1/2	KQB2S16-G04	12	27	26.5	27.8	18.8		113	42.9

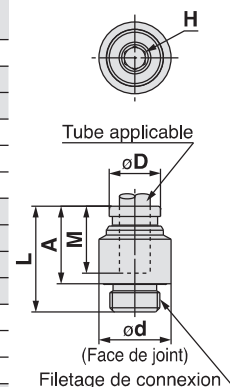

Note 1) Pour les KQB2S16-G03, cette dimension est celle du diam. ext. de la collerette de déblocage.

Note 2) Valeur de tube FEP
Valeur du tube de polyamide pour ø16 uniquement.