


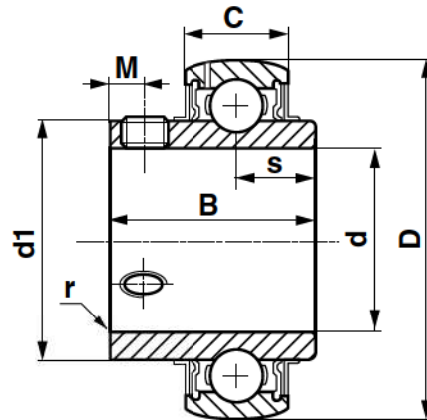

Désignations	Dimensions									
Roulements	Alésage d		D		C		B		s	
	in	mm	in	mm	in	mm	in	mm	in	mm
MUC 202-10 FD	5/8	15,875	1,850	47	0,669	17	1,220	31,00	0,500	12,7
MUC 204-12 FD	3/4	19,050	1,850	47	0,669	17	1,220	31,00	0,500	12,7
MUC 205-16 FD	1	25,400	2,047	52	0,669	17	1,339	34,10	0,563	14,3
MUC 206-18 FD	1-1/8	28,575	2,441	62	0,748	19	1,500	38,10	0,626	15,9
MUC 206-19 FD	1-3/16	30,162	2,441	62	0,748	19	1,500	38,10	0,626	15,9
MUC 206-20 FD	1-1/4	31,750	2,441	62	0,748	19	1,500	38,10	0,626	15,9
MUC 207-20 FD	1-1/4	31,750	2,835	72	0,787	20	1,689	42,90	0,689	17,5
MUC 207-22 FD	1-3/8	34,925	2,835	72	0,787	20	1,689	42,90	0,689	17,5
MUC 207-23 FD	1-7/16	36,512	2,835	72	0,787	20	1,689	42,90	0,689	17,5
MUC 208-24 FD	1-1/2	38,100	3,150	80	0,827	21	1,937	49,20	0,748	19,0

Dimensions						Charges de base				Vitesses limites	Poids	
d1		M		r		C		C _o		tr/min	lbs kg	
in	mm	in	mm	in	mm	dynamique lbf x 1 000 newtons		statique lbf x 1 000 newtons				
1,142	29,0	0,177	4,5	0,039	1,0	2 450	10,90	1 190	5,30	7 400	0,400	0,181
1,142	29,0	0,177	4,5	0,059	1,5	2 450	10,90	1 190	5,30	7 400	0,350	0,159
1,339	34,0	0,197	5,0	0,059	1,5	2 680	11,90	1 420	6,30	6 200	0,400	0,181
1,594	40,5	0,197	5,0	0,059	1,5	3 750	16,70	2 030	9,00	5 300	0,680	0,308
1,594	40,5	0,197	5,0	0,059	1,5	3 750	16,70	2 030	9,00	5 300	0,680	0,308
1,594	40,5	0,197	5,0	0,059	1,5	3 750	16,70	2 030	9,00	5 300	0,680	0,308
1,890	48,0	0,236	6,0	0,079	2,0	4 950	22,00	2 770	12,30	4 500	1,06	0,480
1,890	48,0	0,236	6,0	0,079	2,0	4 950	22,00	2 770	12,30	4 500	1,06	0,480
1,890	48,0	0,236	6,0	0,079	2,0	4 950	22,00	2 770	12,30	4 500	1,06	0,480
2,087	53,0	0,315	6,0	0,079	2,0	5 600	24,90	3 210	14,30	4 000	1,37	0,621