

EC-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EC-type examination in accordance with the article 10 of the PPE. Directive (89/686/EEC) and has been shown to satisfy the relevant provisions of the Directive.

Certificate N° 0075/2346/162/06/17/0867

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

Manufacturer:

Dongtai Wonder Grip Co.,Ltd.

No, 1 Shimu Avenue, Annan Industrial Park, Nan Shenzao Town,

Dongtai City

China

Distributor:

1

Description

PPE Type:

protective glove against mechanical risks

Product reference:

WG640

Glove description:

13G nylon+glass fibre nitrile coated working glove

This product is a category II.

Available sizes:

6/XS 7/S 8/M 9/L 10/XL 11/XXL

Pictures:





Reference standard:

Levels of performance / class of protection

EN 420:2003+A1:2009

EN 388:2016

4342C

The levels of performance have been measured on the palm

At the date of certificate the product is in compliance with Annex XVII of REACh regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EC-type examination and information given on the product are detailed in the manufacturer's technical file index 01 dated from JUNE 2017

NOTA: Any modification to new items of the personal protective equipment object of this CE type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the CE type approval certificate (change of adress, change of company status) should be brought to the attention of the notified body in accordance with law n° R,4313-38 of the French Code of Work

Issued in Lyon by

Lionel Gaudillere PPE certification manager Date of issue: June 22nd 2017



i a

cemarking@ctcgroupe.com

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - ctclyon@ctcgroupe.com

Comité Profussionnel du Développement Économique (CPDE) Cuir Chaussure Maroquillerie Genterie Loi 78:654 du 22.06 1978 - Siret 77564972609160 - Code NAF 9412Z - TVA RR 88775649726



In application of the Directive 89/686/EEC of the 21th December 1989, concerning the alignment of member state legislation relating to personal protective equipment and in application of relevant requirements of the french labor code, providing by the transcription of these Directive into french regulation.

Dongtai Wonder Grip Co.,Ltd.

MANUFACTURER'S TECHNICAL FILE

Reference of the product : WG640

Technical file index : 01

Last update : JUNE 2017

IDENTIFICATION

Reference of the product : WG640

Basic model

Technical file index: 01

Last update : JUNE 2017

Manufacturer:

Dongtai Wonder Grip Co., Ltd.

No, 1 Shimu Avenue, Annan Industrial Park, Nan Shenzao Town, Dongtai City

China

tel: +86-0515-85598826 fax: +86-0515-85598826

Factory:

Dongtai Wonder Grip Co., Ltd.

No, 1 Shimu Avenue, Annan Industrial Park, Nan Shenzao Town, Dongtai City

China

tel: +86-0515-85598826 fax: +86-0515-85598826

Distributor:

1

GLOVE DESCRIPTION

Glove description:

13G nylon+glass fibre nitrile coated working glove

type of coating finish: sandy

Visual description:



Field of use, Risks against which the product protects:

mechanical risk

Available sizes:

Minimum length of glove (mm)	Sizes	
220	6/XS	
230	7/S	
240	8/M	
250	9/L	
260	10/XL	
270	11/XXL	

Glove constitution:

	Reference	Color	Material	Surfacic mass	Gauges	Thickness
Palm		Black	Nitrile	376g/m2		0.22mm
		Black	Nylon/Polyester/Glass fiber	416g/m2	13	
Back		Black	Nylon/Polyester/Glass fiber	416g/m2	13	
Cuff		Black	Nylon/ Polyester/ Glass fiber/ elastic	740g/m2	13	
Binding		red, purple, green, coffee, blue, black	Polyester			

PROTECTION SCOPE

This glove meets the essential requirements of the Personal Protection Equipment Directive (89/686/CE).

This glove is designed for mechanical risks. It is a category II product.

GENERAL REQUIREMENTS

Standard EN 420: 2003 + A1: 2009

Dexterity: 5

PH of glove and lining is greater than 3.5 and lower than 9.5:

Chromium VI lower than the detection limit: conform

Size: conform

At the date of certificate the product is in compliance with Annex XVII of REACh regulation (n° 1907/2006 and revisions)

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

Mechanical hazard EN 388: 2016

Protection offered	Performance levels
Abrasion resistance	4
Blade cut resistance	3
Tear strength resistance	4
Puncture resistance	2
Cut Resistance method (EN ISO 13997)	С
Impact Protection	-

The levels of performance have been measured on the palm

TEST REPORTS

Laboratory	стс	Other
EN 420	S170100254_1 S170302950_1 S170607291_1	
Azo	S170100254_1 S170607291_1	
EN 388	S170100254_1 S161214119_1 S170100251_1	
OTHER	S170100254_1(PAHs, TIN, CAD, DMFu) S170100251_1(ISO13997)	

MARKING - PACKAGING

Information printed on the glove:

Logo of the authorized representative :

Logo (€

Glove's reference: WG640

Size indicator

Pictograms related to risks against which protection is offered with performance levels Information pictogram

Marking example:



Method of marking on the glove:


heat transfer logo on the back of the gloves

Packaging:

1 pair per tag, 12 pairs per polybag, 144 pairs per carton / 12 pairs per polybag, 144 pairs per carton

MEANS OF CONTROL

According To ISO 9001

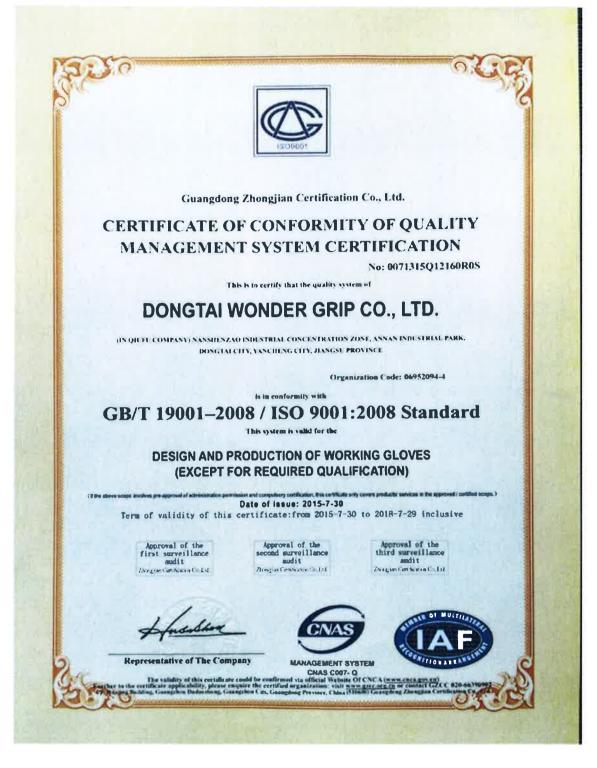

INSTRUCTION FOR USE

Dongtai Wonder Grip Co., Ltd.

No, 1 Shimu Avenue, Annan Industrial Park, Nan Shenzao Town, Dongtai City

China

Glove reference: WG640

Available sizes: 6/XS 7/S 8/M 9/L 10/XL 11/XXL

Glove description:

13G nylon+glass fibre nitrile coated working glove

THIS GLOVE IS A PERSONAL PROTECTIVE EQUIPMENT BELONGING TO THE CATEGORY II.

It meets the requirements of the Directive 89/686/CEE: innocuousness, comfort, solidity.

It has been subject to a CE type Examination performed by :

C,T,C, (OO75) 4, rue Hermann Frenkel 69367 LYON Cedex 07 FRANCE

Applicable standards:

The glove meets the requirements of the standard EN 420 « General requirements for work glove ». Dexterity : 5 Moreover, this glove has been designed for the following applications :

<u>Application</u>:
Mechanical hazard - EN 388



4 3 4 2 C Levels of performance

Abrasion resistance	4	(on 4 maxi)
Blade cut resistance	3	(on 5 maxi)
Tear resistance	4	(on 4 maxi)
Puncture resistance	2	(on 4 maxi)
Cut Resistance method (EN ISO 13997)	С	(A to F)
Impact Protection		

Protection limit:

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted. The levels of performance mentioned are only valid for the palm of the glove. The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated. These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

This glove shall not be in contact with fire.

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.