

Rivet Aveugle ouvert ALFO®



aluminium aluminium
tête plate | ouvert



DIN EN ISO
15981

DONNÉES
CAO
EN LIGNE

Série
701

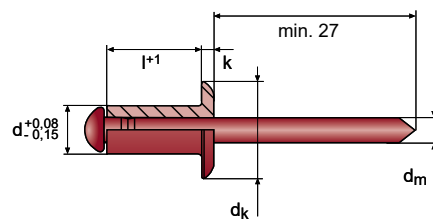

EN AW-5251 [AlMg2]

d	l+1	$\frac{d}{k}$	N°.	
3,2	12,0	7,0 - 9,0	10701032120	500
	10,0	5,0 - 8,0	10701032100	500
	8,0	3,5 - 6,0	10701032080	500
	6,0	0,5 - 4,0	10701032060	500

dk 6,5 -0,7 **dm** 2,0 **k** 0,8 ±0,2 3,3 mm 380 N 670 N

4,0	16,0	8,5 - 12,5	10701040160	500
	12,0	6,5 - 9,0	10701040120	500
	10,0	5,0 - 7,0	10701040100	500
	8,0	3,0 - 5,5	10701040080	500
	6,0	1,0 - 3,5	10701040060	500

dk 8,0 -1,0 **dm** 2,5 **k** 1,0 ±0,3 4,1 mm 740 N 1240 N

d	l+1	$\frac{d}{k}$	N°.	
4,8	16,0	8,0 - 12,0	10701048160	500
	14,0	8,0 - 10,5	10701048140	500
	12,0	6,0 - 8,5	10701048120	500
	10,0	4,0 - 7,0	10701048100	500
	8,0	1,0 - 5,0	10701048080	500

dk 9,5 -1,0 **dm** 2,9 **k** 1,1 ±0,3 4,9 mm 1140 N 1600 N